

Thermal Performance and Durability of Materials on Concrete-Wood Floor Coverings

by Abdul Robbi Maghzaya

Submission date: 25-Sep-2020 12:40AM (UTC+0700)

Submission ID: 1395950464

File name: and_Durability_of_Materials_on_Concrete-Wood_Floor_Coverings.pdf (284.96K)

Word count: 3249

Character count: 16966

Thermal Performance and Durability of Materials on Concrete-Wood Floor Coverings

Eugenius Pradipto¹, Abdul Robbi Maghzaya²

¹Department of Architecture, Gajah Mada University

²Department of Architecture, Islamic University of Indonesia

Abstract

Floor coverings have an important role in buildings. Apart from being the basis for activities in the building, floor coverings also play a role in maintaining room and surface humidity due to the influence of soil and environmental humidity and maintaining room temperature or floor surfaces to be comfortable to use. This function becomes more vital, especially in buildings in a climate where the temperature difference between day and night is large, resulting in very hot days and very cold nights. The problem raised in this study is to offer a floor covering model that can provide a comfortable temperature on the floor surface which results in a quality performance that can keep the surface temperature close to neutral. In this study, observed and tested the temperature and durability of concrete floor blocks with wood branch waste. The construction of this concrete-wooden floor block uses local materials that are easily available and worked on by the common people and the materials are durable.

Keywords: thermal Insulator, wood floor, concrete floor

Introduction

Floor coverings have an important role in buildings. Apart from being a working area in the building, floor coverings also play a role in maintaining the thermal quality of the space and surface due to the influence of soil moisture and the environment (Wang et.al, 2018) and maintaining room temperature or floor surfaces so that they are comfortable to use (Benzaama et.al, 2019). This function becomes more vital, especially in buildings located in hot climates (Staszczuk et.al, 2019; Seo et.al, 2014), for example the East Nusa Tenggara region which has a hot dry climate and has relatively low rainfall (Tanesab et.al, 2017).

In general, this area has a distinctive character where the temperature difference between day and night can reach 14°-18°Celsius, so that the sensation felt during the day is hot while the night is very cold.

Recent developments in the use of floor materials have shown that the use of ceramic floor covering materials is quite popular. However, there is an issue that can be observed that apart from the high price, ceramic floors have a weakness because they have low thermal conductivity (1 W m-1K-1) (García et.al, 2011) which impacts the quality of cold surface temperatures at night. This certainly reduces the comfort of building users. The problem raised in this study is to offer a floor covering model that can provide a comfortable temperature on the floor surface which results in a quality performance approaching a neutral temperature (Zhou et.al, 2019), not too hot and not too cold compared to the air temperature conditions in the environment (Jelle, 2011). In this study,

Abdul Robbi Maghzaya
Department of Architecture, Faculty of Civil Engineering
and Planning, Universitas Islam Indonesia
E-mail: 155120102@uii.ac.id

observe and test the temperature and durability of concrete floor blocks with wood branch waste. This block construction uses local materials that are easily available and worked on by the common people and are durable materials. Also, the material for wooden branches is a material that can be renewed, so that it becomes a material that can continue to be available.

This study aims to see the thermal performance of wood combined with concrete as a floor covering material (Zhou et.al, 2019; Astiaso Garcia, 2016). In addition, observations of the role and behavior of concrete wood floors in direct contact with the ground are seen from the resistance of the material to the effects of environmental humidity. The benefit of this research is to obtain a floor covering model with cheap waste materials that are easily available and also durable from the surrounding environment. The quality of this composite material can be an alternative material that can be able to condition the temperature on the floor surface which can be comfortable when in direct contact with the user.

Literature Review

This research model has not been widely used, but the use of wood material as a flooring material is widely found, especially in areas that have a 4-season climate character. Wooden floors help to provide comfort and warmth to the body surface because the floor can maintain the surface temperature in a stable condition even in an environment that has quite extreme temperature changes (Liu et.al, 2017). In winter temperatures below 0 ° C, wood can still give a warm sensation to the touch. Hardwood fibers are not filled with much water which can freeze so that the wood has insulation properties against heat transfer (Kumar et.al, 2016). The development of wooden floors is quite popular as parquet flooring in areas with a climate character of 4 seasons. In Indonesia, although wood material is quite popular, the development of flooring technology with wood is not too widespread.

The price of wood has recently increased and has become expensive. This is because the production of wood cannot keep up with high demand (Morland et.al, 2016). The growing period of wood is a problem in itself to ensure the availability of material supplies. Another problem that develops with the use of wood

materials is its influence on climate and environmental ecology by cutting down many trees for building needs (Seppälä et.al, 2019). Many wastes from wood utilization can be used for products that are more efficient than just being used as firewood. This waste wood material can be used as a heat insulation material in buildings (Cetiner et.al, 2018). One of the most common wood wastes is hardwood branches, including shrubs with a diameter of 3-10 cm.

Wood is a material that is easily damaged by insect attacks because the cellulose content in it is termite food. Wood has the character to expand and shrink depending on the humidity conditions of the environment. In high humidity or wet environments, wood will fill in the wood grain so that the wood can expand (Kočí et.al, 2020). When the environment is dry or the humidity drops, the wood will shrink, releasing the moisture content in its cavities and also in the wood fibers. At wood humidity above 20% with an ambient temperature of 20°-27° C without heating the sun, blue mushrooms will soon grow within 2-3 days and can soften the wood fibers.

Concrete floors as well as ceramic floors are building materials that have almost the same properties and behavior. Both can withstand biological destroyers and are designed to withstand water (Medina et.al, 2013; Du et.al, 2016). Concrete material can not provide comfort, especially in areas that have high climate change such as areas with high-temperature fluctuations during the day between 32°-38° C and 20° -25° C at night (Al-Rashed et.al, 2020). Concrete is an artificial material that has good mechanical properties, which can withstand high compressive strength but is vulnerable to tensile forces. Beton also has physical properties that are porous so that it can absorb water from wetter places through direct contact (Fu et.al, 2020). Also, concrete has the property to absorb and store heat and release it later for a long time. Properties like this are less beneficial because during the day the heat in the room can be held longer or vice versa at night the cold will be longer.

Method

This research was conducted by observing the wooden-concrete floor block prototype. The prototype is used to see the effect of space or environmental thermal conditions on the physical outer surface of the material. Wood twigs as a composite material were chosen

because they are many and easy to find in the surrounding environment. The process of making this prototype begins by cutting wooden branches according to the thickness of the floor blocks and laying them in a standing position before casting them with cement sand to get a 40x40cm modular block.

The testing phase for this prototype begins with arranging the wooden-concrete floor covering block above the ground without bearing, such as sand. Direct contact with the soil is needed to test the resistance of wooden branches from subterranean termites.

The block floor covering of logs and concrete is measured in two test formulations; (1) The resistance of wood to subterranean termites; by looking at the comparison of the results of the experiment in several timeframes and assessing the quality of the upper and lower surfaces of the wooden-concrete floor blocks. (2) Changes in surface temperature and humidity; tested using 3 measuring instruments in the form; infrared thermometer shafix WT380, Wood moisture tester GM605, and Environment Meter EM-9000.



Figure 1. Infrared thermometer shafix WT380, Wood moisture tester GM605, dan Environment Meter EM-9000

Discussion

After 5 months of observation, the floor block prototype showed some changes in the resistance of wood to termites. The following is an overview of the results of observations on wooden concrete floor blocks in their reaction to the surrounding environment.

Observations show that after 5 months of installation (Figure 2), there are some damages that can be seen in the concrete wooden floor block. One of them is damage to

the wood that has been eaten by termites. Termite damage begins at the bottom of the block in direct contact with the ground (Figure 3).



Figure 2. Installation of wooden concrete floor blocks after 5 months



Figure 3. Condition of the bottom side of the floor block after 5 months

However, although the amount is small, damage to the upper surface of the blocks due to termites also occurs (Figure 4).

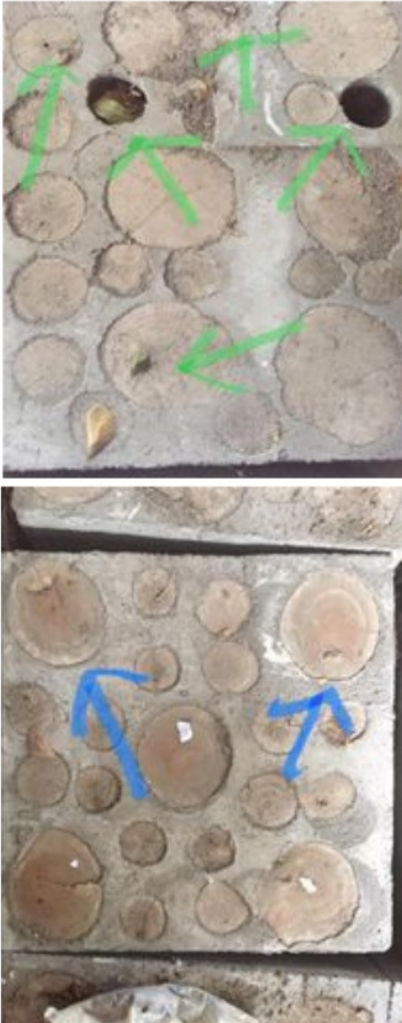


Figure 4. Condition of the top side of the floor block after 5 months

The next observable damage is damage to the wood-concrete block construction due to impact. This condition may rarely occur but shows the need to pay attention to how and techniques to tie the logs to one another so that the wood is not separated from the floor block. This type of damage begins with a shrinkage process that occurs in a wooden branch and is released from the concrete as the binding. The wet condition of the wood when it increases the shrinkage effect on the

wood so that it shrinks. This condition makes the blocks less cohesive and fragile (Figure 5).



Figure 5. Condition of the top side of the floor block after 5 months

The next observation is to measure the temperature and humidity of the wood-concrete block. The following is a description of the data on the results of temperature and humidity measurements on concrete wood floor blocks.

Table 1. Condition of the top side of the floor block after 5 months

Surface		Day	Night
Concrete	Temp.	27.2°C	25.6°C
	Humd.	1.50%	3%
Wood	Temp.	27.9°C	26.0°C
	Humd.	18.00%	18.80%
Air	Temp.	29.8°C	25.8°C
	Humd.	70%	79%

The table above shows the different patterns of surface temperature changes between concrete and wood surfaces on changes in temperature measured during the day and night. During the day (29.8°C), wood and concrete surfaces show a lower temperature than their surroundings. The surface temperature of the concrete shows a temperature of 27.2°C, a difference of 0.7°C compared to the surface temperature of wood, which is 27.9°C. This proves that concrete material has a greater capacity to absorb heat than wood. But in general, the surface condition of this concrete-wood floor block will feel cold by the user.

The environmental humidity which is high enough also affects the moisture level of concrete and wood materials. The character of the wood that can absorb water is greater, causing the moisture level of the concrete-wood block material to be greater than that of concrete up to 18%. With greater humidity and the organic properties of the wood material, this is the reason why the wooden parts of the concrete-wood floor block prototype are more easily damaged.

At night, when the average ambient temperature drops to 25.8°C, the surface temperature of the concrete also drops to 25.6°C, which is 0.2°C lower than the ambient temperature. However, for wood materials, the surface temperature was recorded, although it also fell but was warmer than the ambient temperature, which was 26.0°C. With a higher temperature than the environment, the sensation felt by the user is warm. This condition will help increase comfort both during the day or night.

Conclusion

From the observation and testing of the concrete-wood floor block prototype, it can be concluded that the wood in direct contact with the ground is the part that is most susceptible to damage due to termites. Meanwhile, wood that does not come in direct contact with the ground or covered by a layer of concrete does not indicate a termite attack. Low-quality wood begins to show deterioration earlier than hardwood. Choosing the age of the wood material that is too young causes the wood part to experience shrinkage so that it becomes loose and reduces the strength of this wooden concrete floor block.

Changes in temperature and humidity on the surface of the concrete-wood floor block indicate that the wood elements have the potential to maintain temperature stability in changing environmental temperatures.

Suggestion

From the results of trials and observations of the performance of this concrete-wood floor block, it is necessary to further study the method for using wood combined with concrete as a composite material. In addition, it is necessary to develop a concrete-wood composite material that can minimize the influence of moisture on the physical changes of the material. This suggestion aims to improve the quality of performance of concrete-wood floor block technology as an alternative technology in solving issues related to floor construction.

References

- Al-Rashed, R., & Jabari, M. (2020). Dual-crystallization waterproofing technology for topical treatment of concrete. *Case Studies in Construction Materials*, Staszczuk, (2019), e00408. <https://doi.org/10.1016/j.cscm.2020.e00408>
- Astiaso Garcia, D. (2016). Can radiant floor heating systems be used in removable glazed enclosed patios meeting thermal comfort standards? *Building and Environment*, Staszczuk, 378–388. <https://doi.org/10.1016/j.buildenv.2016.07.013>
- Berger, F., Gauvin, F., & Brouwers, H. J. H. (2020). The recycling potential of wood waste into wood-wool/cement composite.

- Construction and Building Materials*, Staszczuk, 119786. <https://doi.org/10.1016/j.conbuildmat.2020.119786>
- Cen, C., Jia, Y., Liu, K., & Geng, R. (2018). Experimental comparison of thermal comfort during cooling with a fan coil system and radiant floor system at varying space heights. *Building and Environment*, Staszczuk, (February), 71–79. <https://doi.org/10.1016/j.buildenv.2018.05.057>
- Du, H., Gao, H. J., & Pang, S. D. (2016). Improvement in concrete resistance against water and chloride ingress by adding graphene nanoplatelet. *Cement and Concrete Research*, Staszczuk, 114–123. <https://doi.org/10.1016/j.cemconres.2016.02.005>
- Fu, C., Zhu, Y., & Wang, Y. (2020). Stiffness assessment of cracked post-tensioned concrete beams with unbonded tendons based on the cracking pattern. *Engineering Structures*, Staszczuk, (April), 110599. <https://doi.org/10.1016/j.engstruct.2020.110599>
- García, E., De Pablos, A., Bengoechea, M. A., Guaita, L., Osendi, M. I., & Miranzo, P. (2011). Thermal conductivity studies on ceramic floor tiles. *Ceramics International*, Staszczuk, (1), 369–375. <https://doi.org/10.1016/j.ceramint.2010.09.023>
- Jelle, B. P. (2011). Traditional, state-of-the-art and future thermal building insulation materials and solutions - Properties, requirements and possibilities. *Energy and Buildings*, Staszczuk, (10), 2549–2563. <https://doi.org/10.1016/j.enbuild.2011.05.015>
- Kočí, V., Jerman, M., Pavlík, Z., Maděra, J., Žák, J., & Černý, R. (2020). Interior thermal insulation systems based on wood fiberboards: experimental analysis and computational assessment of hygrothermal and energy performance in the Central European climate. *Energy and Buildings*, Staszczuk, <https://doi.org/10.1016/j.enbuild.2020.11093>
- Kuczyński, T., & Staszczuk, A. (2020). Experimental study of the influence of thermal mass on thermal comfort and cooling energy demand in residential buildings. *Energy*, Staszczuk, <https://doi.org/10.1016/j.energy.2020.116984>
- Kumar, A., Staněk, K., Ryparová, P., Hajek, P., & Tywoniak, J. (2016). Hydrophobic treatment of wood fibrous thermal insulator by octadecyltrichlorosilane and its influence on hygric properties and resistance against moulds. *Composites Part B: Engineering*, Staszczuk, 285–293. <https://doi.org/10.1016/j.compositesb.2016.09.034>
- Liu, C., Luo, R., Zhou, S., & Du, G. (2017). The Construction of Heat Storage Performance Testing Method of Wood Materials used for Floor Heating. *Procedia Engineering*, Staszczuk, 3804–3810. <https://doi.org/10.1016/j.proeng.2017.10.116>
- Medina, C., Sánchez De Rojas, M. I., & Frías, M. (2013). Properties of recycled ceramic aggregate concretes: Water resistance. *Cement and Concrete Composites*, Staszczuk, 21–29. <https://doi.org/10.1016/j.cemconcomp.2013.04.005>
- Morland, C., Schier, F., Janzen, N., & Weimar, H. (2018). Supply and demand functions for global wood markets: Specification and plausibility testing of econometric models within the global forest sector. *Forest Policy and Economics*, Staszczuk, (March), 92–105. <https://doi.org/10.1016/j.forpol.2018.04.003>
- Seppälä, J., Heinonen, T., Pukkala, T., Kilpeläinen, A., Mattila, T., Myllyviita, T., Asikainen, A., & Peltola, H. (2019). Effect of increased wood harvesting and utilization on required greenhouse gas displacement factors of wood-based products and fuels. *Journal of Environmental Management*, Staszczuk, (June), 580–587. <https://doi.org/10.1016/j.jenvman.2019.06.031>
- Seo, J. M., Song, D., & Lee, K. H. (2014). Possibility of coupling outdoor air cooling and radiant floor cooling under hot and

humid climate conditions. *Energy and Buildings*, Staszczuk, 219–226. <https://doi.org/10.1016/j.enbuild.2014.06.023>

Staszczuk, A., & Kuczyński, T. (2019). The impact of floor thermal capacity on air temperature and energy consumption in buildings in temperate climate. *Energy*, Staszczuk, 908–915. <https://doi.org/10.1016/j.energy.2019.05.202>

Tanesab, J., Parlevliet, D., Whale, J., & Urmee, T. (2017). Seasonal effect of dust on the degradation of PV modules performance deployed in different climate areas. *Renewable Energy*, Staszczuk, 105–115. <https://doi.org/10.1016/j.renene.2017.03.091>

Zhou, X., Liu, Y., Luo, M., Zhang, L., Zhang, Q., & Zhang, X. (2019). Thermal comfort under radiant asymmetries of floor cooling system in 2 h and 8 h exposure durations.

Energy and Buildings, Staszczuk, 98–110. <https://doi.org/10.1016/j.enbuild.2019.02.009>

Acknowledgement

This paper and the research behind it would not have been possible without the exceptional support of my institution, Department of Architecture Gajah Mada University and Islamic University of Indonesia. Their enthusiasm, resources and exacting attention to detail have been an encouragement and kept my work on track. I am also grateful for the insightful comments offered by the anonymous peer reviewers at Books & Texts. The generosity and expertise of one and all have improved this study in innumerable ways and saved me from many errors; those that inevitably remain are entirely my own responsibility.

Thermal Performance and Durability of Materials on Concrete-Wood Floor Coverings

ORIGINALITY REPORT

0%

SIMILARITY INDEX

3%

INTERNET SOURCES

0%

PUBLICATIONS

0%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

3%

★ www.proof-reading-service.com

Internet Source

Exclude quotes On

Exclude matches < 2%

Exclude bibliography On