

paper

by Muhammad Yasin

Submission date: 18-Nov-2019 06:29PM (UTC+0700)

Submission ID: 1213610518

File name: paper_revisi_3_bismillah.doc (164.5K)

Word count: 2539

Character count: 13273

Travel Itinerary Planning using Traveling Salesman Problem, K-Means Clustering, and Multithreading Approach

Abstract

In this paper we proposed an algorithm for arranging travel itinerary using various approaches such as, traveling salesman problem with genetic algorithm, k-means clustering, and multithreading. The algorithm will be applied to develop a web based application which capable of making itinerary planning recommendation. This paper mainly focusing on how the proposed algorithm able to optimize the application in terms of computational processing time for the sake of efficiency. To make the itinerary recommendation, travelers must fill the input requirements such as number of days for vacation and list of destinations which they wish to visit. The destinations will first be clustered. Then find the TSP solution for the best route for each cluster. This TSP solution will be the itinerary recommendation.

Keywords— traveling salesman problem; Travel itinerary; k-means clustering; multithreading; genetic algorithm

I. INTRODUCTION

Travel itinerary can be determined as travel plans of tourists activity, which includes a detailed description of the attractions and activities of the destination visited, as well as the duration and specification of time and services provided [8]. The process of making travel plans becomes the next challenging problem to be solved [1].

In real world situation some constraints of travel itinerary planning problem are unable to completely predefined [6]. However, we found that there are some constraints which can be defined such as, distance and time. By using these constraints we can provide optimal itinerary recommendation, assuming that the travelers have specified all the travel destinations they want to visit and how many days they will stay in the region.

The application needs to solve two sub-problems. These problems include grouping the travel destinations which travelers wish to visit for each day and create the travel route by arranging the destinations in a specific order so that it will have the least cost of travel distance.

Traveling Salesman Problem can be stated as if a salesman wishes to visit list of cities once for each city and then return the home city, what is the route which has the least cost?[2]. In this study a salesman can be interpreted as travelers and the visited list of cities are travel destinations.

In this study we also apply parallel programming technique to maximize the application performance. The technique is simply running the application in multiple threads so that the

minimum application processing time can be acquired. This technique is called multithreading.

II. PRELIMINARIES

A. Travelling Salesman Problem (TSP)

TSP is a well known problem in graph theory and combinatorics [1]. Mathematical problems related to TSP were discussed by the British mathematician Thomas Penyngton Kirkman and by the Irish mathematician Sir William Rowan Hamilton and in the 1800s [3]. In popular languages, traveling salesman problem can be described as a problem to find the least cost of travel distance in n cities, starting and ending in the same city and travel each city exactly once [4]. Many approaches and algorithms has been proposed to solve TSP such as Heuristic Algorithms, Metaheuristic Algorithms, Approximate Algorithms, and Exact Algorithms. The issue of TSP that processes no more than 20 cities can be solved optimally using the Exact method. The method which can provide reasonably high quality TSP solutions by processing large numbers of cities is the heuristic method [5]. In this study we use genetic algorithm as a heuristic approach to solve traveling salesman problem in order to maximize the program efficiency. The process of genetic algorithm includes:

1. Create the population.

In this case the population can be defined as a collection of possible route. A single route is interpreted as the chromosome which contains list of travel destinations, and each destination is called genes. Each chromosome will have fitness value

2. Determine Fitness.

After creating the population, we will determine the fitness for each chromosome. In traveling salesman problem fitness value can be interpreted as distance where the shorter the distance the greater the fitness value.

3. Select the parents that will be used to create next generations

Parent is selected based on their fitness value. There are several method for how to select the parents. The most common are roulette wheel selection and tournament selection. For this study we use roulette wheel selection.

4. Crossover

For TSP we use ordered crossover. In ordered crossover we select a subset of the first parent by random, then fill the rest of the route with the genes from the second parent.

5. Mutation

Mutation can be defined as random changes to maintain the genetic diversity from within population, which usually applied in specified low probability. For TSP we use swap mutation. It means that the destinations or the genes within the chromosome will be swapped.

6. Repeat the process for the specified number of generations

B. K-Means

K-means is a simple clustering method to cluster data set into k groups based on their similarity. K-means assign each member of cluster by calculating the Euclidean distance. The goal of k-means is to minimize sum of square of distance between all data points with the center of each cluster. The process of k-means includes:

1. Specify the number of cluster k.
2. Initialize centroids by randomly selecting k data points from the dataset
3. Calculate the euclidean distance between all data points and all centroids, then assign each data point to the nearest cluster
4. Update centroids by calculating the means of all data points that belong to each cluster
5. Iterate until there are no more changes to the centroids

The advantage of using k-means is that it provides a simple, easy to use and fast algorithm. For this study to avoid empty cluster or clusters having very few data points we use constrained k-means[7]. The algorithm is done by adding constraint to the clustering optimization problem requiring each cluster contains specified number of data points[7].

C. Multithreading

Multithreading is the ability of computer or central processing unit (CPU) to run application in multiple threads concurrently. In this study we utilize multithreading to reduce the application processing time so that it can be more efficient. This technique is implemented in the developed application by simply create multiple threads with the same number of cluster, then run the program in each thread. More detailed explanation about how multithreading is implemented discussed in section 3 of the paper.

III. METHODOLOGY

For this study we choose Yogyakarta Province as an example to demonstrate how the developed application with the proposed algorithm make travel itinerary recommendation.

There are some input requirements in the application which are number of days for vacation and the destinations the travelers want to visit. The destination can be filled with the address where the travelers want to visit.

The application consist of two main modules, which are clustering module using k-means and finding TSP solution using genetic algorithm. Some processes that need to be done by the application are accessing the travel destinations that the travelers want to visit, making travel itinerary recommendation, and displaying the itinerary result. The system model is presented in Figure 1.

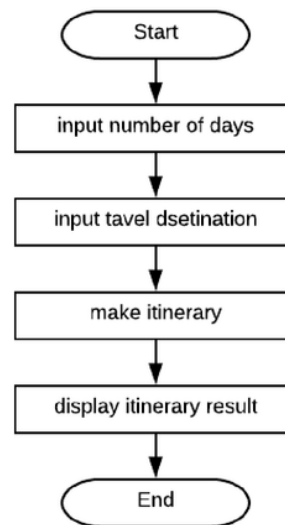


Figure 1. System Flowchart

Figure 1 explain the work flow of the application. The process begins by inputting the number of days and travel destinations. Then the system will make itinerary recommendation based on the inputted data. After that it will display the result. To be more specific figure 2 will explain the process of making the itinerary recommendation.

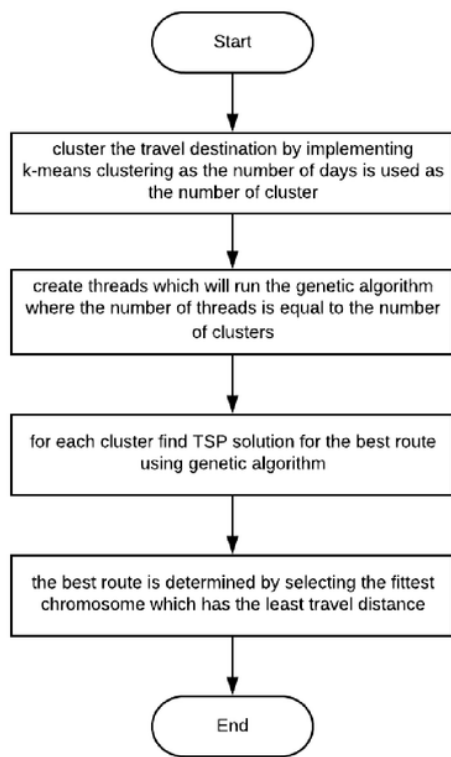


Figure 2. Detail process of making itinerary

Figure 2 explain the detail process of making itinerary. Start by clustering the travel destinations using k-means, where the number of days is used as k number of cluster. Next is creating threads where the number of threads is equal to the number of clusters. Each thread will run the genetic algorithm containing list of destinations from each cluster. After that, finding the TSP solution for the best route using genetic algorithm. Then select the fittest chromosome which has the least travel distance. The distance is calculated by using Google Maps Distance Matrix API. This chromosome can be illustrated as the travel route which contains travel destinations. The fittest chromosome or route considered as the itinerary recommendation.

The process of making itinerary recommendation will also be executed with multithreading technique. The application will run in multiple threads. To implement this technique first we need to create the threads, to create thread we need to determine the number of threads. In this scenario the number of threads is equal to the number of cluster. Then we execute the genetic algorithm function which will solve the TSP solution in each thread. For example if the number of cluster is 2 then we create two threads and execute the genetic algorithm in thread 1 and thread 2. Thread 1 run the algorithm which consists travel destinations from cluster 1 and thread 2 run the

algorithm which consists travel destinations from cluster 2. The example of the multithreading implementation can be seen in Figure 3.

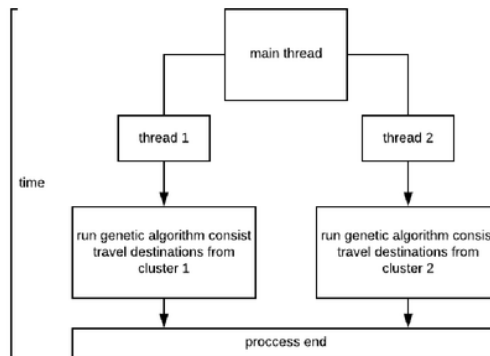


Figure 3. Multithreading Implementation

IV. RESULTS

The developed application consists two pages, first page is used to get the input from user and the second page is used for displaying the itinerary result. In the first page user can specify the number of days of vacation and desired travel destinations. Since the application is on development phase it still performs in very simple interface. Figure 4 shows the example of implementation in the first page.

Figure 4. First Page

As we can see from figure 4, user inputs 2 days as the number of vacation days, and inputs kraton yogyakarta, malioboro yogyakarta, candi prambanan, istana ratu boko, and gembira loka zoo as travel destinations by filling the form field. After user submit the form the application will process the data using the proposed algorithm as described in section 3 of this paper. The itinerary result can be seen in Figure 5.

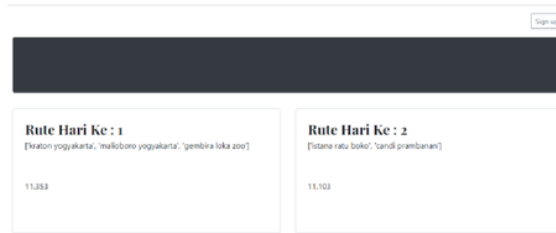


Figure 5. Second Page

1 On the first day user gets recommendation of 3 travel destinations to visit, first we go to kraton yogyakarta then to malioboro, last we go to gembira loka zoo and the distance is 11.353 km. while on the second day user gets 2 travel destinations, first go to istana ratu boko then to candi prambanan with 11.103 km of total distance. Since in this study we use heuristic approach instead of exact calculation, the result may not be exactly the best route. However it still provide the reasonable result.

Since we use genetic algorithm to solve TSP or in this case finding the best route for itinerary recommendation, we run the algorithm with 50 population size and 50 generations. For small batch of TSP, using graph theory or brute force method may be more efficient. However for large batch of TSP, this method is no longer considered as efficient, since the number of permutation will be very large. The implementation of genetic algorithm can be the reasonable method.

For experiment, we will analyze the application processing time. There are two type of experiments, first we run the program without multithreading and second we use multithreading. The multithreading is implemented by creating threads with the same number of cluster then run the specific function that solve TSP by finding the best route or in this case, the genetic algorithm function in each thread. For each scenario we run the program 5 times then calculate the mean value of the processing time. Even though the input data is the same, the processing time may vary due to the some factors such as, internet connection since we use Google Maps API, computer memory, and also processor speed. The result is presented in Table 1.

Table 1. Result without multithreading

No.	Days	Destinations	Mean of Processing Time (seconds)
1.	2	5	2.3736
2.	2	6	2.4424
3	2	7	2.6907
4.	2	8	2.7698
5.	2	10	3.1313
6.	2	12	3.3960
7.	2	15	3.6029
8.	2	20	4.0027
9.	3	6	2.4245
10.	3	7	2.5872
11.	3	8	2.8919
12.	3	10	3.3385

13.	3	12	3.5142
14.	3	15	3.6633
15	3	20	4.5537

Table 2. Result with multithreading

No.	Days	Destinations	Mean of Processing Time (seconds)
1.	2	5	2.0238
2.	2	6	2.1779
3	2	7	2.2835
4.	2	8	2.4687
5.	2	10	2.8557
6	2	12	2.8358
7.	2	15	3.1969
8.	2	20	3.9768
9.	3	6	2.5183
10.	3	7	2.5811
11.	3	8	2.6498
12.	3	10	3.0491
13.	3	12	3.3950
14.	3	15	3.6448
15.	3	20	4.2451

From this result we can see that with large number of destinations the program can run with reasonable amount of processing time. If we compare the result from table 1 to [1], our algorithm can be considered more efficient in terms of processing time. Although for small number of destinations the processing time from [1] is slightly shorter, the difference is not very big. However for the large number of destinations, at 12 destinations with 3 number of days for example, our algorithm is almost 53% faster. While in table 2, by implementing multithreading the processing time is slightly increases. If we see from the result of table 2, multithreading implementation help minimize the program processing time. However when the number of days and destinations increases, interestingly there are no much difference between table 1 and table 2. Even once it gets longer at 6 destinations with 3 number of days.

V. CONCLUSION AND FUTURE WORK

In this paper we use k-means, traveling salesman problem, and multithreading approach to develop travel itinerary planning application. The application can help travellers to plan their vacation automatically. The use of genetic algorithm can significantly reduce the applications processing time. However the algorithm can only be efficient with large batch of TSP, while in real world situation travellers usually don't visit many locations. On the other hand the implementation of multithreading slightly helps minimize the program processing time. As we can see from the result the difference is not very significant. For future work perhaps we should expand the multithreading approach to even paralel clustering.

VI. REFERENCES

- [1] S. Rani, K. Kholidah and S. N. Huda, "A development of travel itinerary planning application using traveling salesman problem and k-means clustering approach," *Proceedings of the 2018 7th International Conference on Software and Computer Applications*, pp. 327-331, 2018.
- [2] K. L. Hoffman, M. Padberg and G. Rinaldi, "Traveling Salesman Problem," *Encyclopedia of operations research and management science*.
- [3] W. Cook, "History of the TSP," January 2007. [Online]. Available: <http://www.math.uwaterloo.ca/tsp/history/index.html>. [Accessed 11 November 2019].
- [4] C. Rego, D. Gamboa, F. Glover and C. Osterman, "Traveling salesman problem heuristics: Leading methods, implementations and latest advances," *European Journal of Operational Research*, 211(3), pp. 427-441, 2011.
- [5] U. Nuriyev, O. Ugurlu and F. Nuriyeva, "Self-Organizing Iterative Algorithm for Travelling Salesman Problem," *IFAC-PapersOnLine*, 51(3), pp. 268-270, 2018.
- [6] J.-S. Chen and F.-C. Hsu, "Interactive Genetic algorithms for a Travel Itinerary," *TSP I*, p. 13, 2000.
- [7] P. S. Bradley, K. P. Bennet and A. Demiriz, "Constrained K-means Clustering," *Microsoft Research, Redmond*, vol. 7, 2000.
- [8] A. A. da Silva, R. Morabito and V. Pureza, "Optimization approaches to support the planning and analysis of travel itineraries," *Expert Systems with Applications*, 112, pp. 321-320, 2018.

paper

ORIGINALITY REPORT

20%

SIMILARITY INDEX

6%

INTERNET SOURCES

17%

PUBLICATIONS

11%

STUDENT PAPERS

PRIMARY SOURCES

1

Septia Rani, Kartika Nur Kholidah, Sheila Nurul Huda. "A Development of Travel Itinerary Planning Application using Traveling Salesman Problem and K-Means Clustering Approach", Proceedings of the 2018 7th International Conference on Software and Computer Applications - ICSCA 2018, 2018

Publication

6%

2

hal.archives-ouvertes.fr

Internet Source

2%

3

Submitted to Chiang Mai University

Student Paper

1%

4

webhotel4.ruc.dk

Internet Source

1%

5

Urfat Nuriyev, Onur Ugurlu, Fidan Nuriyeva. "Self-Organizing Iterative Algorithm for Travelling Salesman Problem", IFAC-PapersOnLine, 2018

Publication

1%

Admilson Alcântara da Silva, Reinaldo Morabito,

6

Vitória Pureza. "Optimization approaches to support the planning and analysis of travel itineraries", Expert Systems with Applications, 2018

Publication

1%

7

Ting Huang, Yue-Jiao Gong, Yu-Hui Zhang, Zhi-Hui Zhan, Jun Zhang. "Automatic Planning of Multiple Itineraries: A Niching Genetic Evolution Approach", IEEE Transactions on Intelligent Transportation Systems, 2019

Publication

1%

8

Dibbendu Singha Sopto, Safial Islam Ayon, M. A. H. Akhand, N. Siddique. "Modified Grey Wolf Optimization to Solve Traveling Salesman Problem", 2018 International Conference on Innovation in Engineering and Technology (ICIET), 2018

Publication

1%

9

Submitted to University of Durham

Student Paper

1%

10

Submitted to Heriot-Watt University

Student Paper

1%

11

Submitted to Cranfield University

Student Paper

1%

12

Bradley, Paul, Kristin Bennett, and Indrajit Bhattacharya. "Using Assignment Constraints to

1%

Avoid Empty Clusters in k-Means Clustering",
Chapman & Hall/CRC Data Mining and
Knowledge Discovery Series, 2008.

Publication

13

Submitted to CSU, San Jose State University

Student Paper

1%

14

Submitted to Bilkent University

Student Paper

1%

15

Submitted to University of Wales, Bangor

Student Paper

<1%

16

R. V. Patil, K. C. Jondhale. "Edge based
technique to estimate number of clusters in k-
means color image segmentation", 2010 3rd
International Conference on Computer Science
and Information Technology, 2010

Publication

<1%

17

Submitted to Texas A & M University, Kingville

Student Paper

<1%

18

Dong, G.. "Solving the traveling salesman
problem using cooperative genetic ant systems",
Expert Systems With Applications, 201204

Publication

<1%

19

Submitted to University of Brighton

Student Paper

<1%

20

Submitted to Coventry University

Student Paper

<1%

21

Submitted to Rutgers University, New Brunswick

Student Paper

<1%

22

Submitted to RMIT University

Student Paper

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography On